

READ THESE INSTRUCTIONS THOROUGHLY BEFORE INSTALLATION KEEP THESE INSTRUCTIONS FOR FUTURE REFERENCE.

IMPORTANT:


This product must be installed by a qualified electrician or competent person, and in accordance with current building and IET wiring regulations.

BOX CONTENTS

This lighting fixture has been properly packed to avoid damage during transit. Before commencing with the installation carefully inspect the luminaire to confirm there is no damage. DO NOT INSTALL if any damage has occurred to the fixture or any of its components.

- Light Fitting
- Instruction Manual
- Fixing Kit

TOOLS REQUIRED



- Drill




- Screwdriver




- Cable

INSTALLATION INSTRUCTIONS


1: Wall installation

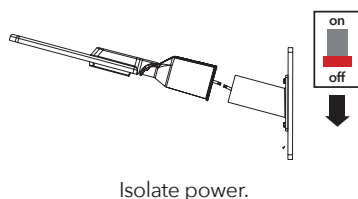


2

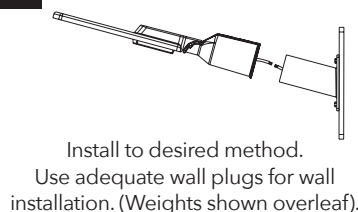


3

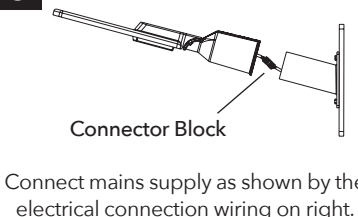


4

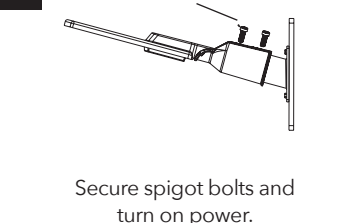


1: Vertical installation

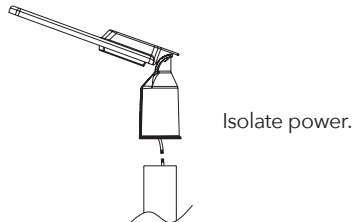


2

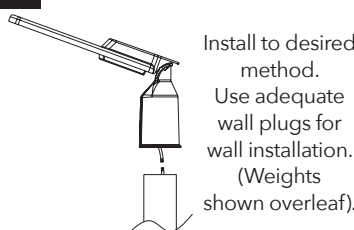


3

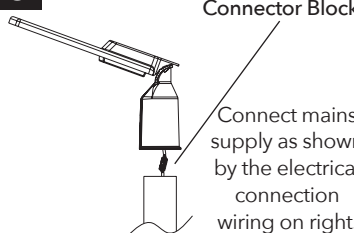


4

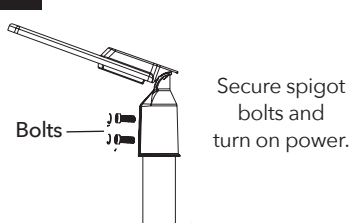


1: Elbow installation




2



3



4



PLEASE READ THESE INSTRUCTIONS BEFORE INSTALLATION.



WARNING: Risk of electric shock! Isolate the mains power before proceeding.

- Turn off the mains power before performing inspections, installation, or removal
- Verify that the supply voltage is correct by comparing it with the luminaire label information
- It is the installers responsibility to ensure installation is suitable for the total load of the luminaire(s). The supply cable, fuses/circuit breakers must be correctly rated for the electrical load and considering for any transient inrush currents that may occur
- Do not perform insulation strength or resistance tests on installed luminaire(s) connected

Electrical connection wiring



Brand	Wago
Connector Type	Lever
Current Rating	32A
Model Name	222 Series
Product Type	Connector
Suitable Cable Size	0.08 - 4mm ²

LIVE (L) = Brown

Earth (⊕) = Yellow/Green

NEUTRAL (N) = Blue

Connect the incoming supply using a suitable terminal and junction box as required. (Recommended WAGO 222)

DISPOSAL

Disassembly instructions for end of life disposal available on website.

Disposal of Electronic Equipment WEEE Directive 2002/96/EC This product falls within the scope of the Waste Electrical & Electronic Equipment Directive (WEEE), which means the product should not be disposed of as normal household waste. Please recycle where facilities exist or check with your Local Authority. RoHS - All components and materials used in this product are RoHS 2002/95/EC compliant.

Specifications may change from time to time. The information contained in this leaflet is for guidance only and should not be considered as always accurate and should be treated as not representative.

WARRANTY


This luminaire is warranted for a period of 5 years from the date of purchase.** The warranty could be invalidated should the light fitting not be installed according to these instructions, outside the scope of the specification or the product has been altered or tampered with in any way. Please see website for terms and conditions.

PRODUCT TEMP SPECIFICATION

Standard -30°C to +50°C

WINDERMERE STREETLIGHTS DIMENSIONS

Part No.	Description	Watts	L (mm)	W (mm)	H (mm)	Weight
430611	Windermere Streetlight	30W	425	140	79	1.05Kg
430612	Windermere Streetlight	50W	425	140	79	1.25Kg
430613	Windermere Streetlight	70W	425	140	79	1.25Kg



Installation Engineers Contact Details:

Name:

Tel:

Luminaire Reference / Location

This product contains a light source of energy efficiency Class C & D.