


Dimensions:

Part No.	Description	L (mm)	W (mm)	H (mm)	Hole Cut-Out	Weight
430725	Weston Backlit Downlight 7W	90	90	30	75mm	100g
430726	Weston Backlit Downlight 10W	120	120	30	95mm	128g
430727	Weston Backlit Downlight 15W	145	145	30	115mm	155g
430728	Weston Backlit Downlight 20W	185	185	30	155mm	225G
430729	Weston Backlit Downlight 24W	220	220	30	180mm	375g

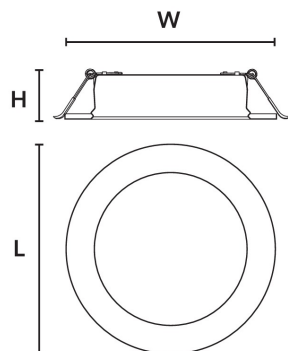

End Of Life Disposal:

Disassembly instructions for end of life disposal available on website.

Disposal of Electronic Equipment WEEE Directive 2002/96/EC This product falls within the scope of the Waste Electrical & Electronic Equipment Directive (WEEE), which means the product should not be disposed of as normal household waste. Please recycle where facilities exist or check with your Local Authority. RoHS - All components and materials used in this product are RoHS 2002/95/EC compliant. Specifications may change from time to time. The information contained in this leaflet is for guidance only and should not be considered as always accurate and should be treated as not representative.

Installation Instructions

Weston Downlight

Input	220–240V AC
Power	7W/10W/15W/20W/24W
Operating Temp	0°C – +45°C
Connection Type	3 Pin Loch Connector
Emergency Option	430451 (Sold Separately)
Control Connection	N/A
Light Source Energy Rating	C & D



Box Contents:

- Weston Downlight Fitting
- Loch3 Connector



Professionally Replaceable



Professionally Replaceable



Quick Connector



Flicker Free



Class II



Ingress Protection

Tools Required For Installation:

- Drill
- Screwdriver



READ THESE INSTRUCTIONS THOROUGHLY BEFORE INSTALLATION
KEEP THESE INSTRUCTIONS FOR FUTURE REFERENCE.

IMPORTANT:

This product must be installed by a qualified electrician or competent person, and in accordance with current building and IET wiring regulations.

Warranty:

This luminaire is warranted for a period of 5 Years from the date of purchase**. The warranty could be invalidated should the light fitting not be installed according to these instructions, outside the scope of the specification or the product has been altered or tampered with in any way. Please see website for terms and conditions.